

DESCRIPTION

- Available finishes identified by suffix
- Nonmetallic spray face and shell
- Brass swivel ball assembly

OPERATION

- 3 functions: massage, full and combined
- Rotate outer ring to select

FLOW

- Designed to deliver 1.75 gpm (6.65 L/min) at 80 psi

STANDARDS


- Designed and manufactured to comply with the requirements of: ASME A112.18.1/CSA B125.1 and all requirements referenced therein
- IAPMO Green listed and third party certified for WaterSense®

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

Envi™ Eco-Performance 3-Function Showerhead

Models: 3233EP series

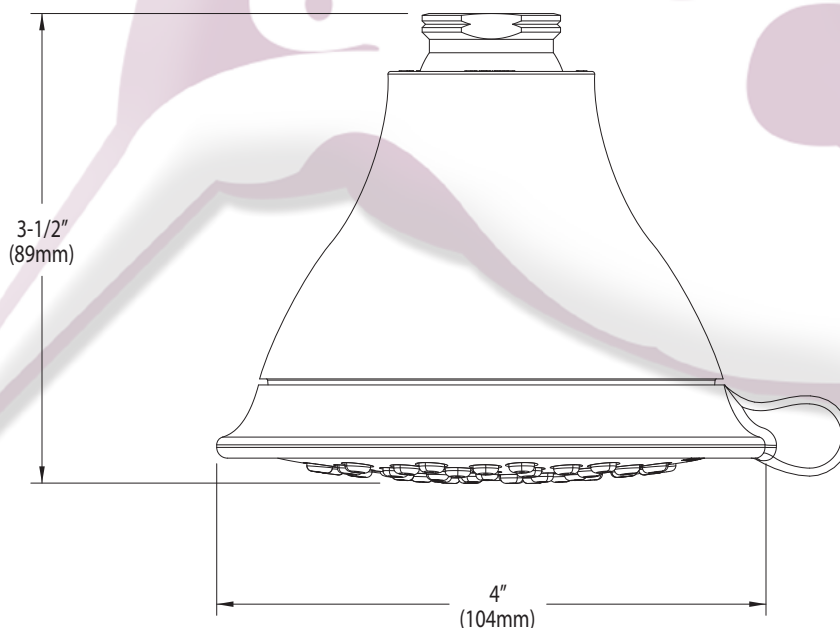

CRITICAL DIMENSIONS

(DO NOT SCALE)

