


# Regaderas

# H-2000

## Regadera de Chorro Regulable



Medidas Referenciales




Acot.mm.(pulg)

## Despiece

NA

Mod.	Descripción
1 Sr-080	Economizador
2 Rr-073	Opresor Allen 8-32
3 Rr-137	Tuerca H-2000
4 Rr-250	Inserto para Tuerca Regadera
5 Rr-136	Nudo para Regadera H-2000
6 Rh-217	O'ring 2-118
7 Rr-260	Cpo. Interior p/ Regadera H-2000
8 Rr-259	O'ring 2-212
9 Rh-345	O'ring 2-112
10 Rr-102	Perilla H-2000
11 Rr-054	O'ring 2-277
12 Rr-258	Plato para Regadera H-2000
13 Rr-135	Emblema H-2000
14 Rh-274	Tornillo Phillips 8-32 UNC-2A x 9/16"

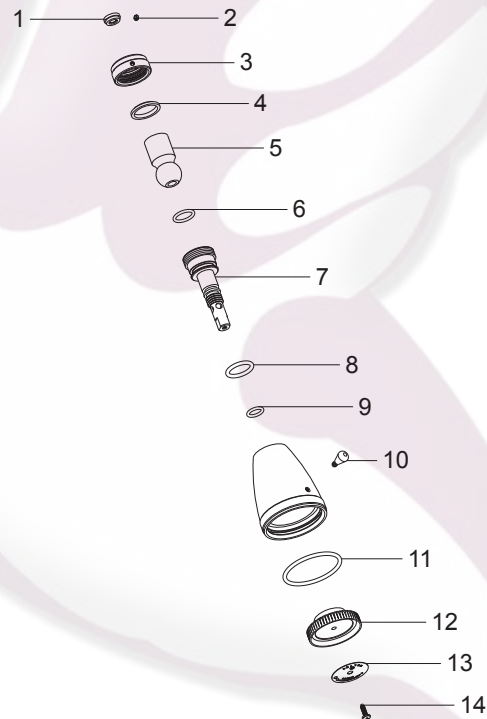

## Características y Datos Técnicos

Regadera de Media y Alta Presión  
Economizador Dinámico de Agua  
Cumple con la Norma NOM-008-CONAGUA-1998  
Incluye Nudo Móvil  
Chorro Regulable

**Material:**  
Latón

**Conexión:**  
1/2" - 14 NPT

**Gasto Mínimo:**  
4,0 l/min (1,05 Gpm)

**Gasto Máximo:**  
10,0 l/min (2,64 Gpm)

**Presión de Trabajo:**

Pmin= 1,0 kg/cm<sup>2</sup> (14,22 PSI)

Pmax= 6,0 kg/cm<sup>2</sup> (85,34 PSI)

**HELVEEX** M.R.

garantía de calidad

