



# Specifications

#### DESCRIPTION

- Metal construction with various finishes identified by suffix
- Quick connect installation
- Pullout spray with 59" braided hose
- Flexible supply lines with 3/8" fittings connect directly to supply stop
  360° rotating spout

# OPERATION

- Lever style handle
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pullout or retracted position
- When filling a vessel outside the sink, the pause feature conveniently
- stops the flow of water as the wand passes over the counter top

#### FLOW

- Flow is limited to 2.2 gpm (8.3 L/min) at 60 psi
- CARTRIDGE
- 1255<sup>™</sup> Duralast<sup>™</sup> cartridge for Single-Handle Faucets
- **STANDARDS**
- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA for lever handle
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow

#### WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installation



# ASCENT<sup>™</sup> 90 Single Handle High Arc Pullout Kitchen Faucet

# Model: S71709 series

### **NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1 HOLE, 1-1/2" (38mm) MIN. DIA.

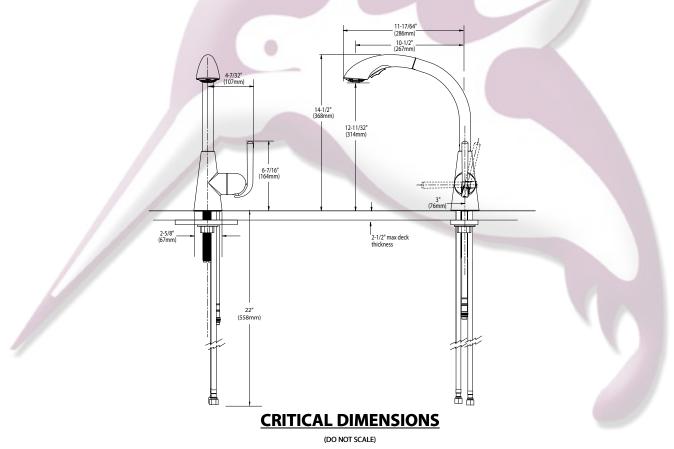



Tels. (81) 8375.0992-93 con 6 lineas www.colibrimty.com info@colibrimty.com 🚮 🕒 💩 @colibrimty