

FAUCET DESCRIPTION

- Metal construction with chrome plated finish

OPERATION

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to $\pm 3^{\circ} F (\pm 2^{\circ} C)$

CARTRIDGE

- 1222 cartridge design
- Nonmetallic/nonferrous and stainless steel materials
- Accommodates back to back installations

STANDARDS

- Third party certified to meet CSA B-125.1, ASME A112.18.1, and all applicable requirements referenced therein

- **ADA**  for lever handle

WARRANTY


- Lifetime limited warranty against leaks, drips, and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations



ZARINA™ POSI-TEMP®
Single-Handle Shower
(Valve Trim Only)

Model: T2531

Valves: 62300 series
2500 series

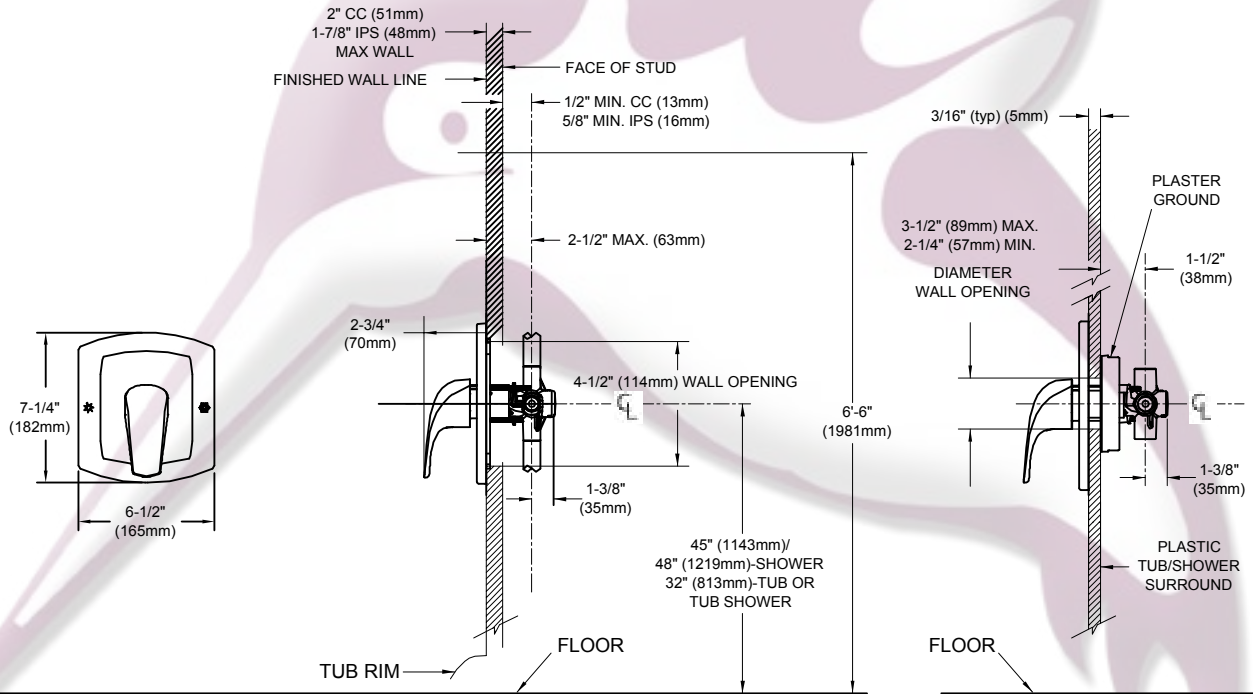

THICK WALL APPLICATION

THIN WALL APPLICATION



CRITICAL DIMENSIONS

(DO NOT SCALE)

