

► Code Number

3918159

► Description

Concealed, Hydraulically Activated Royal® Water Closet Flushometer, for Stainless Steel back spud water closets and Combination Fixtures. For use with: Acorn® Bradley® Willoughby® and similar fixtures.

► Flush Cycle

1.6 gpf/6.0Lpf

► Specifications


Quiet, Concealed, Rough Brass Closet Flushometer for either left or right hand supply with the following features:

- Vacuum Breaker
- Exposed Parts Chrome Plated
- Non-Hold-Open Push Button, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Dual Filtered Bypass Diaphragm
- Handle Packing, Stop Seat and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine Resistance
- 1" I.P.S. Wheel Handle Bak-Chek® Angle Stop
- Elbow Flush Connection and Coupling for 1½" NPT Back Inlet (for connection in the pipe chase — flush connection through the wall not provided by Sloan)

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

► Variations

MBPM - Metal Button Panel Mount Actuator

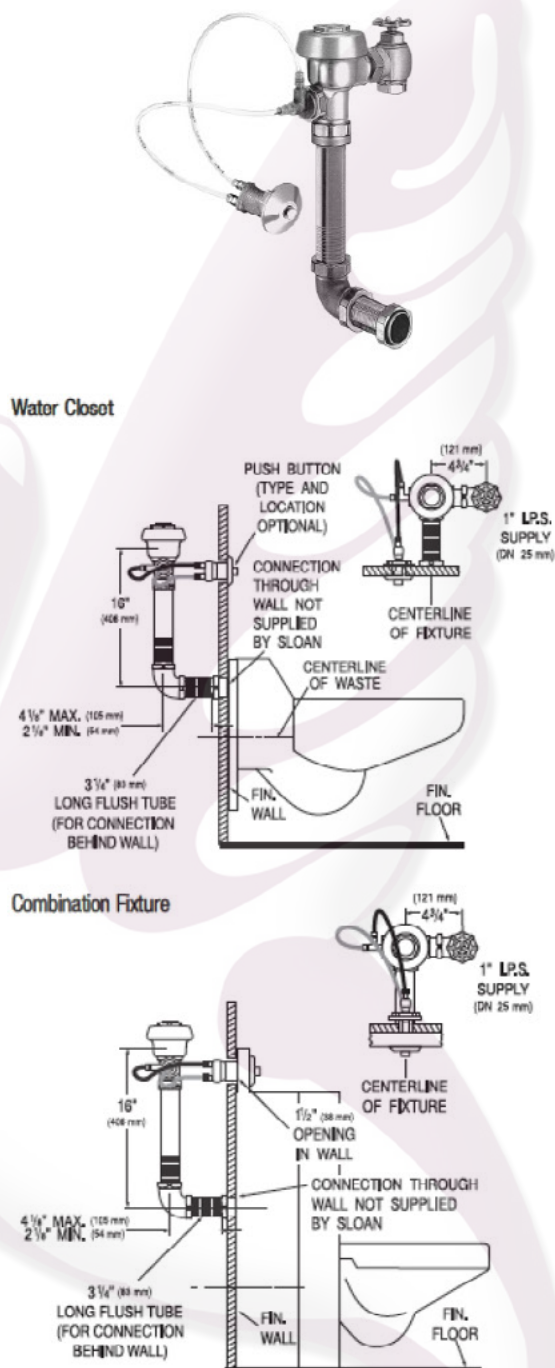

► Compliance & Certifications



Made In The
USA ★

