

► **Code Number**

3918197

► **Flush Cycle**

1.6 gpf/6.0Lpf

► **Description**

Concealed, Hydraulically Activated Royal® Water Closet Flushometer, for Stainless Steel back spud water closets and Combination Fixtures. For use with: Acorn® Bradley® Willoughby® and similar fixtures.

► **Specifications**

Quiet, Concealed, Rough Brass Closet Flushometer for either left or right hand supply with the following features:

- PERMEX® Synthetic Rubber Diaphragm w/Dual Filtered Fixed Bypass
- ADA Compliant Non-Hold-Open Actuator
- 1" I.P.S. Wheel Handle Bak-Chek® Angle Stop
- Adjustable Tailpiece
- High back pressure vacuum breaker
- Elbow Flush Connection and Coupling for 1½" NPT Back Inlet (for connection in the pipe chase — flush connection through the wall not provided by Sloan)
- Exposed Parts Chrome Plated
- High Copper, Low Zinc Brass Castings for Dezincification Resistance
- Non-Hold-Open Push Button, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Diaphragm, Stop Seat and Vacuum Breaker to be molded from PERMEX® rubber compound for Chloramine resistance

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.


► **Variations**

MBFW - Metal Button Fixture Wall Actuator (HY-100-A) (rear access)


HY-100-A



Water Closet

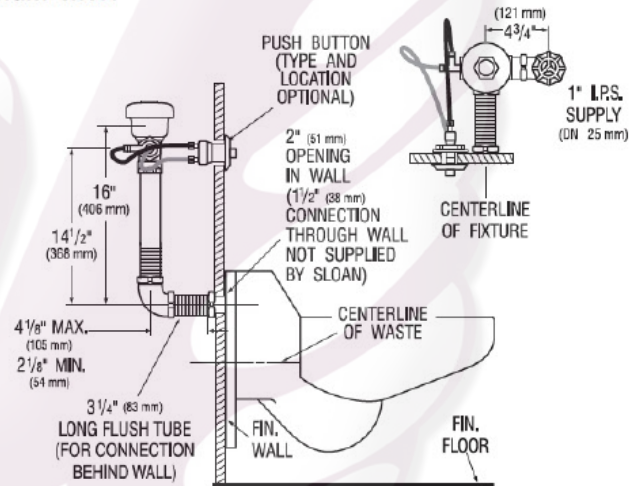

Combination Fixture

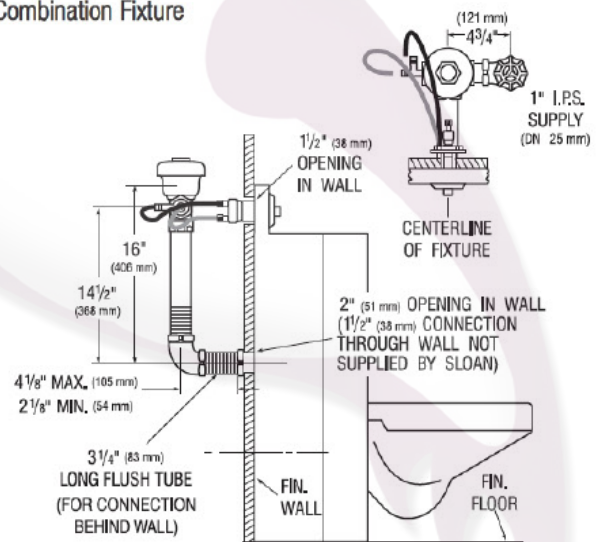

► **Compliance & Certifications**



Made In The
USA

