

**DESCRIPTION**

- Various finishes identified by suffix
- Fixed mount showerhead only
- Nonmetallic spray face
- Nonmetallic shell

**OPERATION**

- Single spray

**FLOW**

- Showerhead is limited to 2.5 gpm (9.5 L/min) at 80 psi
- EP suffix models are limited to 1.75 gpm (6.6 L/min) at 80 psi

**STANDARDS**

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- EP suffix models are IAPMO Green listed and third party certified to WaterSense®

**WARRANTY**

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations





**EASY CLEAN® XLT**  
**Single Function Showerhead**

**Models:** 6303 series

**Single Function Showerhead,  
Arm & Flange**

**Models:** 6307 series

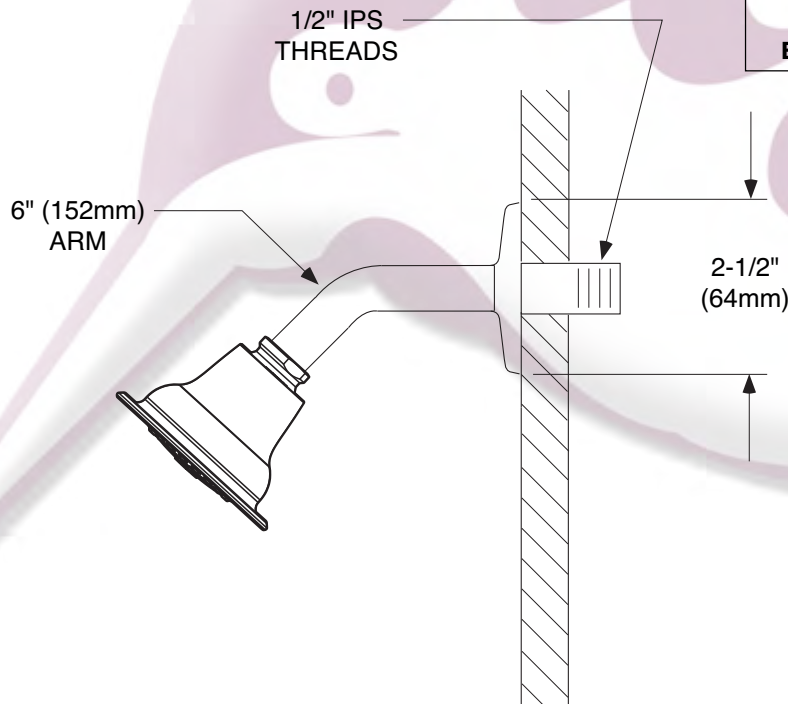

**CRITICAL DIMENSIONS**

(DO NOT SCALE)



Tels. (81) 8375.0992-93 con 6 líneas

www.colibrimty.com info@colibrimty.com    @colibrimty