



Specifications

DESCRIPTION

- · Metal construction with a chrome plated finish
- Flexible supplies with 3/8" compression fittings
- Includes pop-up waste assembly
- Includes 3 hole deck plate (escutcheon) for L84733 only
- OPERATION
- Lever style handle
- Temperature controlled by 100° arc of handle travel **FLOW**
- Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi **CARTRIDGE**
- 1255[™] Duralast[™] cartridge for single-handle faucets **STANDARDS**
- Third party certified to ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein
- Third party certified to comply with WaterSense® high Efficiency Bathroom Sink Faucet Specification
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA 🛃 for lever handle

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations



Danika™ Single-Handle Lavatory Faucet Models: 64733 L84733 (includes deck plate)

Note: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1 HOLE, 1-1/8" MIN. DIA.



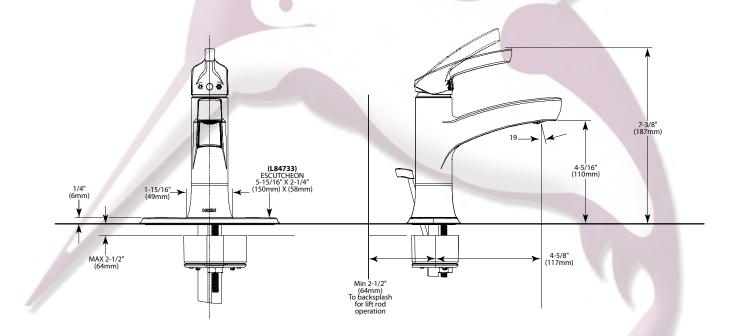

CRITICAL DIMENSIONS

(DO NOT SCALE)



Tels. (81) 8375.0992-93 con 6 lineas www.colibrimty.com info@colibrimty.com 🚮 🔄 💩 @colibrimty