

**PRODUCT DESCRIPTION**

- Brass construction w/chrome plated finish
- 3/4" IPS supply
- 3/4" top spud
- 6" cable tube
- 18 guage x 24" (+) (-) wire leads
- Optional power adapters
- Single AC transformer (12v) #104406
- Multi-unit AC transformer (powers up to 8 units) #104401

**OPERATION**

- Adjustable sensor eye
- Low consumption AC powered (12 Volt transformer required)
- Self-diagnostic electronics
- Piston flushing mechanism
- Self cleaning filter system

**FLOW**

- Operating pressures 10 to 120 psi
- 0.125 gpf (.48 lpf)
- 24 hour sentinel flush
- Mechanical manual override button

**VALVES**

- 3/4" IPS angle stop (vandal resistant)


**STANDARDS**

- Third party certified by IAPMO and CSA to meet WaterSense®, ASME A112.19.2M and all applicable requirements referenced therein and complies with requirements of ASSE 1037

- **ADA** 

**WARRANTY**

- Warranted for 5 years against material or manufacture defects

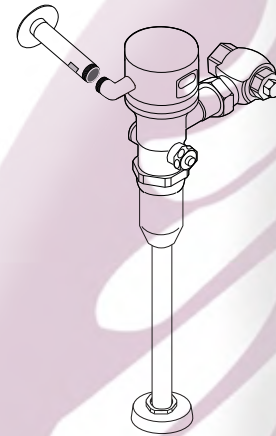


**3/4" AC Powered Exposed Style  
Urinal Flush Valve**

**Model: 8316AC**



*\*Intended for use with matching flow rates  
as specified by the fixture manufacturer*

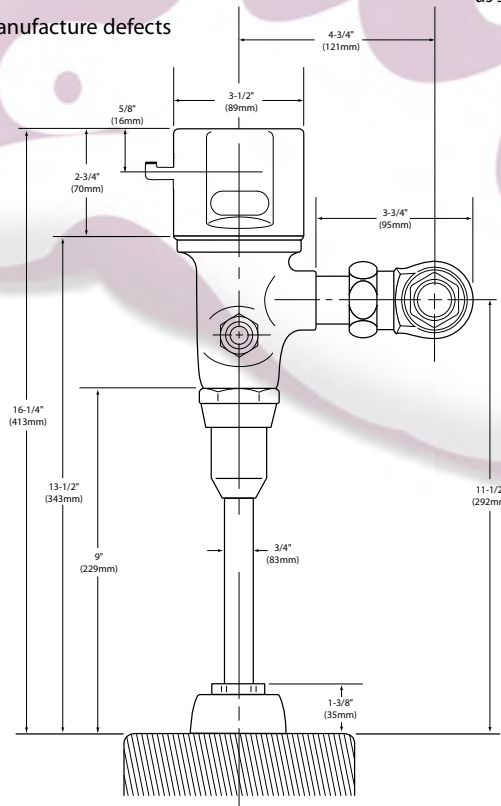

**CRITICAL DIMENSIONS**

(DO NOT SCALE)

