

# Specifications

Buy it for looks. Buy it for life.®

#### There is more than 1 version of this model. Page down to identify the version you have.

### DESCRIPTION

- Metal construction with various finishes identified by suffix
- 1/2" IPS connections

#### OPERATION

- Pivot action lever style handle
- Temperature controlled through 180° degree arc of handle travel FLOW
- Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi, for products made before October 2008 flow is limited to 2.2 gpm max (8.3 L/min)

#### CARTRIDGE

- 1225 cartridge design
- Nonmetallic/nonferrous and stainless steel material
- Can accommodate reversed piping and back to back installations

#### STANDARDS

- Third party certified to WaterSense,<sup>®</sup> CSA B125.1, ASME A112.18.1, ICC A117.1, and all applicable requirements referenced therein
- Certified to ANSI/NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA 🛃 for lever handle

#### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations



### CHATEAU<sup>®</sup> Single-Handle Lavatory Faucet

with Metal Waste Assembly Models: L4621 series


Bulk Pack Models (12 Per Carton): L64620 series

with 50/50 Waste Assembly Bulk Pack Model (12 Per Carton): L64621 series

> Less Waste Model: L4601 series

#### Bulk Pack Model (12 Per Carton): L64601series

**NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 3-1" DIA. HOLES, 2" ON CENTER

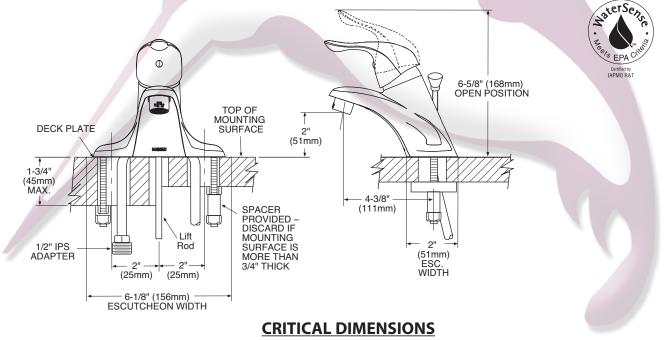

(DO NOT SCALE)



Tels. (81) 8375.0992-93 con 6 lineas www.colibrimty.com info@colibrimty.com 🚮 🕒 過 @colibrimty



DESCRIPTION

**OPERATION** 

CARTRIDGE

**STANDARDS** 

WARRANTY

FLOW

1/2" IPS connections

Pivot action lever style handle

2.2 gpm max (8.3 L/min)

1225 cartridge design

Certified to ANSI/NSF 61/9

ADA 🛃 for lever handle

Metal construction with various finishes identified by suffix

Temperature controlled through 180° degree arc of handle travel

Can accommodate reversed piping and back to back installations

Third party certified to WaterSense,<sup>®</sup> CSA B125.1, ASME A112.18.1,

Lifetime limited warranty against leaks, drips and finish defects

ICC A117.1, and all applicable requirements referenced therein

for products made before October 2008 flow is limited to

Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi,

Nonmetallic/nonferrous and stainless steel material

Complies with California Proposition 65 and with

the Federal Safe Drinking Water Act

## Specifications



## **CHATEAU® Single-Handle Lavatory Faucet**

with Metal Waste Assembly Models: L4621 series


Bulk Pack Models (12 Per Carton): L64620 series

with 50/50 Waste Assembly Bulk Pack Models (12 Per Carton): L64621 series

> Less Waste Models: L4600 series, L4601 series

Bulk Pack Models (12 Per Carton): L64601 series

NOTE: THIS FAUCET IS DESIGNED TO BE

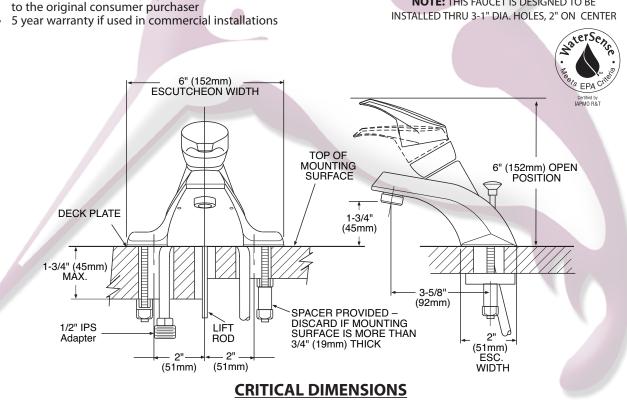

(DO NOT SCALE)



Tels. (81) 8375.0992-93 con 6 lineas www.colibrimty.com info@colibrimty.com 🛐 🕒 🛅 @colibrimty