



Buy it for looks. Buy it for life.®

### FAUCET DESCRIPTION

- Metal construction with chrome finish
- Includes showerhead, arm, flange and diverter spout

### OPERATION

- Lever style handle with temperature indicator on the escutcheon
- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to  $\pm 3.6^\circ \text{F}$  ( $\pm 2^\circ \text{C}$ )

### FLOW

- Showerhead is limited to 2.5 gpm (9.5 L/min) at 80 psi
- EP suffix models are limited to 2.0 gpm (6.6 L/min) at 80 psi

### CARTRIDGE

- 1222 cartridge design
- Nonmetallic/nonferrous and stainless steel materials
- Accommodates back to back installations


### STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- EP suffix models are third party certified to WaterSense®
- **ADA** for lever handle

### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations


# Specifications

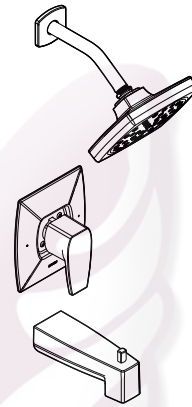

## Via™ POSI-TEMP® Single-Handle Tub/Shower Trim Kit

**Model:** TS8711 series - valve trim only  
TS8712 series - shower trim only  
TS8713 series - tub/shower trim only

**Valves:** 62300, 2500 series

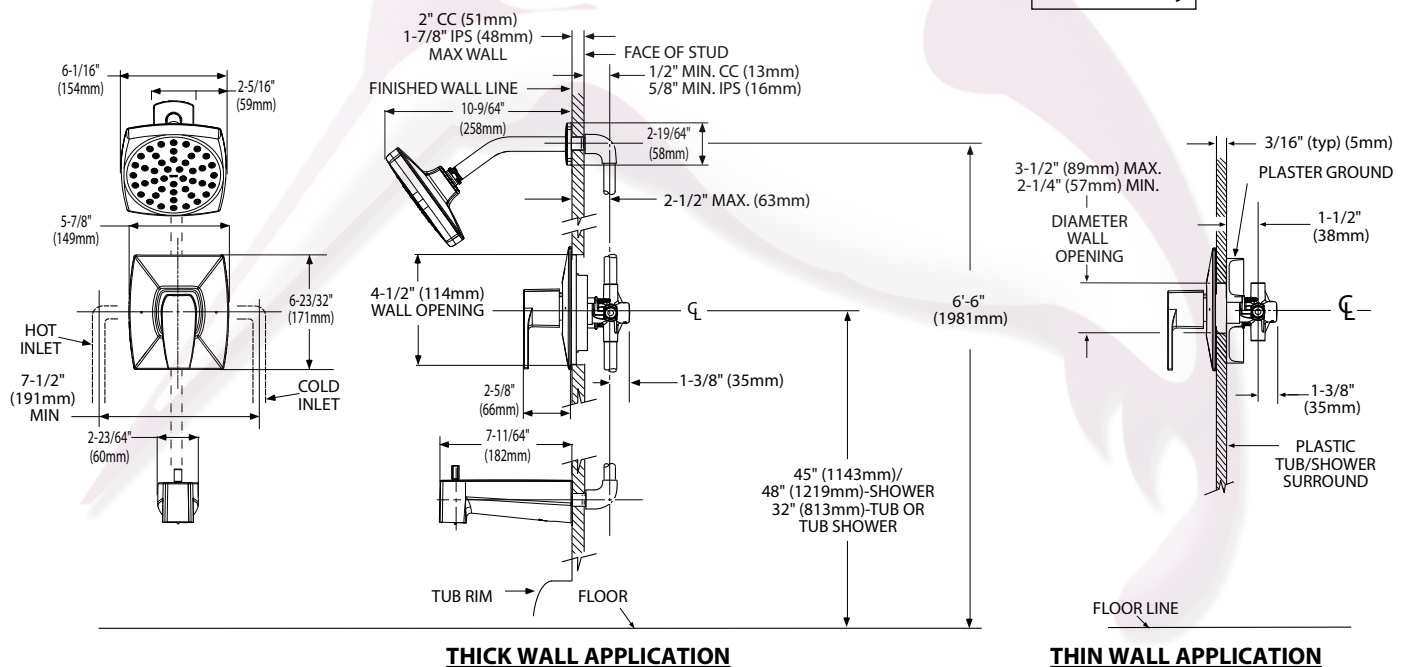

## CRITICAL DIMENSIONS

(DO NOT SCALE)



Tel.8375.0992/93, 8372.3713/14/15  
Prol.Ruiz Cortines #307 Pte. Col.Paseo de Cumbres Mty N.L. C.P.64346  
www.colibrimty.com colibrimty