



Encore



COMPLIES WITH:
ASME A112.18.1-2005
CSA B125.1-05
NSF/ANSI 61 / 9
Uniform Plumbing Code




Encore® Single Post Basin Tap with SANIGUARD® Metering Handle
KN87-9205-__ __

ENGINEERING SPECIFICATION:

Deck mount single valve chrome plated polished brass body with one 1/2" NPSM inlet and integral 5" cast spout. Basin Faucet is vandal resistant with ADA /compliant metering valve. Metering handle is treated with SANIGUARD®. Metering valve has an adjustable cycle time, preset to 25 seconds at 60 PSI (to comply with ANSI A112.18.1 Standard). Unit is furnished with a 0.5 MAX GPM (0.9 L) at 60 vandal resistant aerator (complying with ANSI A112.18.1 Standard for flow). Mounting hardware and base gasket w/sealant recess included. Unit accommodates installations up to 1-1/2" (38mm) thick.

TECHNICAL/PERFORMANCE SPECIFICATIONS:

Commercial Specification Grade Gaskets and Seals Rated
Commercial Hot 180°F
1/2" NPSM Male Inlet w/ mounting hardware
Operating Temperature: 40 - 180°F
Operating Pressure: 15 - 125psi

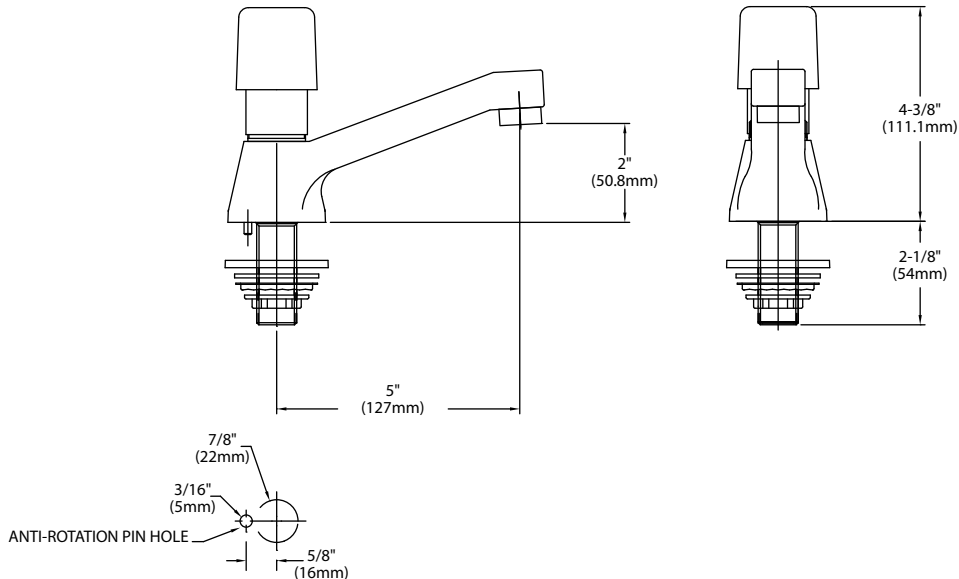

Dimensions shown in inches (mm) are for reference only and are subject to change.


Part Numbers:

KN87 - 9205 -

Handle

Cold
Hot
Universal

C
H
U



Outlet

0.5 GPM PCA Spray, Vandal Resistant
1.5 GPM Max Laminar Vandal Resistant
0.5 GPM PCA Spray
1.5 GPM Max Laminar
2.2 GPM Max Aerator

A
B
C
D
E