

**PRODUCT DESCRIPTION**

- Brass construction w/chrome plated finish
- 1" IPS supply
- 1-1/2" top spud

**OPERATION**

- Adjustable sensor eyes
- Battery powered (4) standard AA (included)
- Average battery life 250,000 cycles
- Self-diagnostic electronics
- Piston flushing mechanism
- Self cleaning filter system
- Low battery indicator light

**FLOW**

- Operating pressures 10 to 125 psi
- 1.28 gpf/4.8Lpf (gallons per flush)
- 24 hour sentinel flush
- Manual override button

**VALVE**

- 1" IPS angle stop (vandal resistant)
- Adjustable installation (left or right connection)


**STANDARDS**

- Third party certified by IAPMO and CSA to meet ASME A112.19.2M and all applicable requirements referenced therein and complies with requirements of ASSE 1037

- **ADA** 


**WARRANTY**

- Warranted for 5 years against material or manufacture defects.

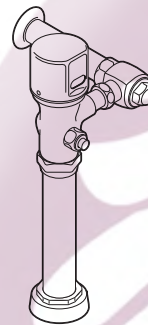

**1-1/2" Battery Powered Exposed Style  
Closet Flush Valve**

**Model: 8311**

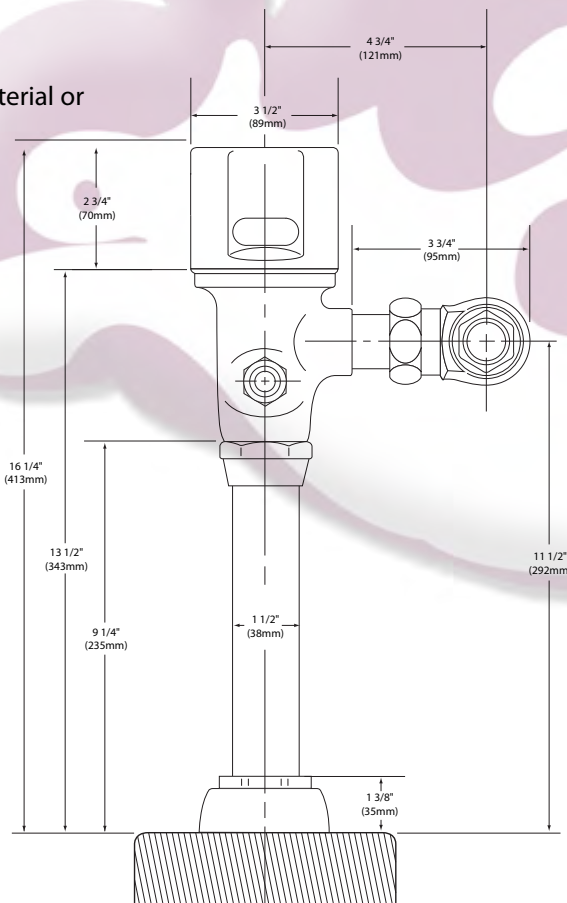

**CRITICAL DIMENSIONS**

(DO NOT SCALE)



Tels. (81) 8375.0992-93 con 6 lineas

www.colibrimty.com info@colibrimty.com    @colibrimty