

**PRODUCT DESCRIPTION**

- Brass construction w/chrome plated finish
- 1" IPS supply
- 1-1/2" top spud
- 6" cable tube
- 18 guage x 24" (+) (-) wire leads
- Optional power adapters
- Single AC transformer (12v) #104406
- Multi-unit AC transformer (power up to 8 units) #104401

**OPERATION**

- Adjustable sensor eyes
- Low consumption AC powered (12 Volt transformer required)
- Self-diagnostic electronics
- Piston flushing mechanism
- Self cleaning filter system

**FLOW**

- Operating pressures 10 to 125 psi
- 1.28 gpf (4.8 lpf)
- 24 hour sentinel flush
- Manual override button

**VALVE**

- 1" IPS angle stop (vandal resistant)
- Adjustable installation (left or right connection)


**STANDARDS**

- Third party certified by IAPMO and CSA to meet ASME A112.19.2M, ASSE 1037 and all applicable requirements referenced therein

• **ADA** 


**WARRANTY**

- Warranted for 5 years against material or manufacture defects.

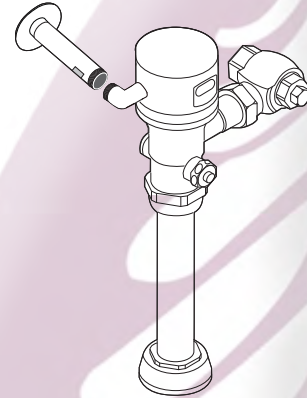

**1-1/2" AC Powered Exposed Style  
Closet Flush Valve**

**Model: 8311AC12**

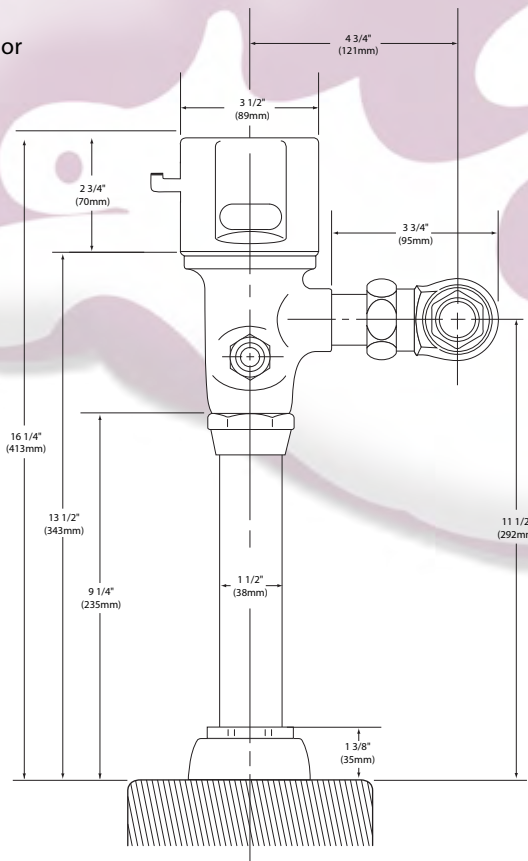

**CRITICAL DIMENSIONS**

(DO NOT SCALE)



Tels. (81) 8375.0992-93 con 6 líneas

www.colibrimty.com info@colibrimty.com    @colibrimty