

DESCRIPTION

Complete HEU system with exposed, battery powered, sensor activated, Royal® OPTIMA® SMOOTH™ urinal Flushometer and vitreous china urinal.

Flush Cycle

Model WEUS6000.1403-0.13SMOOTH
 (1/8 gpf/.5 Lpf)



SPECIFICATIONS

Quiet, exposed, diaphragm type, chrome plated urinal Flushometer and vitreous china urinal with the following features:

Flushometer

- PERMEX® Synthetic Rubber Diaphragm with Dual Filtered Fixed Bypass
- ADA compliant metal oscillating Non-Hold-Open Handle with Triple Seal Handle Packing
- 3/4" I.P.S. Screwdriver Bak-Chek® Angle Stop
- Free spinning Vandal Resistant Stop Cap
- Adjustable Tailpiece
- High Back Pressure Vacuum Breaker Flush Connection with One-piece Bottom Hex Coupling Nut
- Spud Coupling and Flange for 3/4" Top Spud
- Sweat Solder Adapter w/Cover Tube and Cast Wall Flange w/Set Screw
- High copper, low zinc brass castings for dezincification resistance
- Non-Hold-Open Handle, Fixed Metering Bypass and no external volume adjustment to ensure water conservation
- Flush accuracy controlled by CID® technology
- Diaphragm, Handle Packing, Stop Seat and Vacuum Breaker molded from PERMEX® rubber compound for chloramine resistance
- Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037, ANSI/ASME A112.19.2, and Military Specification V-29193.

OPTIMA® SMOOTH™ Unit

- ADA compliant OPTIMA® SMOOTH™ battery powered infrared sensor for automatic "Hands-free" operation
- Sensor with automatic range adjustment
- Chrome plated metal sensor housing
- Mechanical Manual Override Flush Handle
- Four (4) size C batteries included
- "Low Battery" flashing LED
- "User in View" flashing LED
- 25 to 80 psi operating range
- Vandal resistant 1/8" ball-type hex key included

Urinal

- Wall hung vitreous china
- Washdown flushing action
- 3/4" I.P.S. top spud inlet
- 2" I.P.S. spud outlet
- All mounting hardware included
- Integral flushing rim

FEATURES

ADA Compliant

Automatic

Sloan SMOOTH™ equipped Flushometers provide the ultimate in sanitary protection and automatic operation. There is no need for AC hookups or wall alterations. The Flushometer operates by means of a battery powered infrared sensor. True mechanical manual over-ride button enables the Flushometer to work in the event of a power failure. State-of-the-art technology enables activation of a manual override without "double flushing" occurring as the user departs (locks out sensor for approximately 10 seconds).

Hygienic

The Royal® OPTIMA® SMOOTH™ Flushometer System is the next advancement in hygiene. User makes no physical contact with the Flushometer surface except to initiate the Mechanical Manual Override Flush Handle when required. Helps control the spread of infectious diseases.

Economical

Automatic operation provides water usage savings over other flushing devices. Reduces maintenance and operation costs. Installation and battery replacement does not require turning off water to the valve.

Warranty

3 year (limited)



Sloan Valve Company is buying renewable energy certificates to meet 100% of the company's purchased electricity use at its Franklin Park, Illinois facility.

DESCRIPTION


Complete HEU system with exposed, battery powered, sensor activated, Royal® OPTIMA® SMOOTH™ urinal Flushometer and vitreous china urinal.

Flush Cycle 6000.1403-0.13
 Model WEUS SMOOTH
 (1/8 gpf/.5 Lpf)

ELECTRICAL SPECIFICATIONS

- **Control Circuit**
 6 VDC input, 8 second arming delay, 72 hour Sentinel Flush
- **OPTIMA® Sensor Range**
Normal Range (recommended for Water Closets) with 2 – 3 second flush delay:
 26" – 32" (660 mm – 813 mm)
Normal Range (recommended for Water Closets) with 1 – 2 second flush delay:
 26" – 32" (660 mm – 813 mm)
Reduced Range (recommended for Urinals) with 1 – 2 second flush delay:
 20" – 26" (508 mm – 660 mm)
- **OPTIMA® Sensor Type**
 Active infrared with automatic adjustment
- **Battery Type**
 (4) Size C Alkaline
- **Battery Life**
 2 Years @ 4,000 flushes/month
- **Indicator Lights**
 User in view/low battery
- **Operating Pressure**
 25 – 80 psi (172-552 kPa)

OPERATION

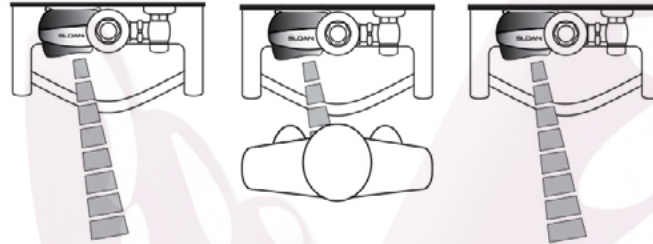

1. A continuous, invisible light beam is emitted from the SMOOTH™ unit's Infrared Sensor.
2. When the user enters the sensor's effective range, the Red LED light in the sensor window flashes for eight seconds. After eight seconds of sensing the user, the light will stop flashing and the unit waits for the user to step away before initiating a flush cycle.
3. When the user steps away, the unit initiates a flush cycle. The unit then automatically resets and is ready for the next user.

DIMENSIONS

