



Buy it for looks. Buy it for life.®

Specifications

DESCRIPTION

- Various finishes identified by suffix
- Handshower with Magnetix™ docking
- 59" double interlock spiral hose (metal), for Chrome only
- Assembled with two check valves for backflow prevention
- Adjustable bracket

OPERATION

- Six function
- Wall bracket rotates to adjust angle of handshower

FLOW


- Designed to deliver 2.5 gpm (9.5 L/min) max. at 80 psi
- EP suffix models are limited to 2.0 gpm (7.6 L/min) max. at 80 psi

STANDARDS

- Designed and manufactured to comply with the applicable requirements of WaterSense®, ASME A112.18.1/CSA B-125.1, ASSE 1014 and all applicable specifications referenced therein
- EP suffix models are third party certified to WaterSense®


WARRANTY

- Lifetime limited warranty against material or manufacturing defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

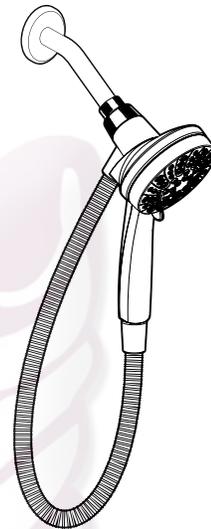

**Engage™
Handshower
with Bracket & Hose**

Models: 26100 series

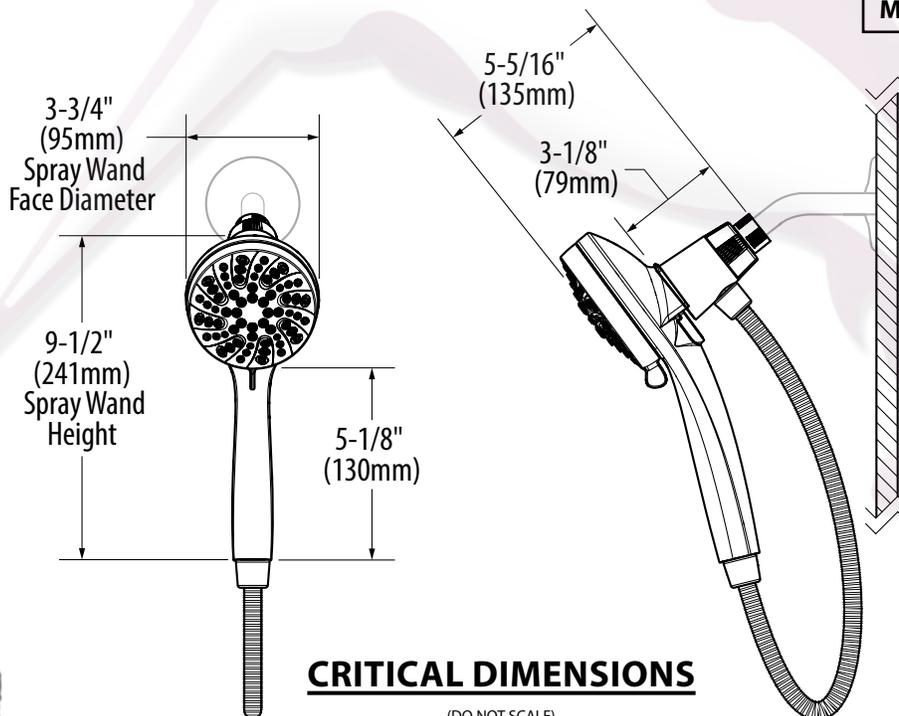

Tel.8375.0992/93, 8372.3713/14/15
Prol.Ruiz Cortines #307 Pte. Col.Paseo de Cumbres Mty N.L. C.P.64346

www.collbrimty.com collbrimty