

► **Code Number**
10061001

► **Description**

Complete HEU system with exposed manual Royal® urinal Flushometer and vitreous china urinal fixture.

► **Flush Cycle**

1.0 gpf/3.8 Lpf

► **SPECIFICATIONS**

Specifications

Quiet, exposed, diaphragm type, chrome plated urinal Flushometer and vitreous china urinal with the following features:

Fixture Specifications

- Washdown flushing action
- All mounting hardware included
- Carrier not included
- Vandal resistant strainer assembly included
- Wall hung vitreous china with Integral flushing rim
- ¾" I.P.S. top spud inlet
- 2" NPT outlet flange
- 100% factory flush tested
- Complies to the applicable sections of: ANSI/ASME A112.19.2 and CSA B45.1


Flushometer Specification

- Non-Hold-Open Operation
- Flex Tube Dual Filtered Bypass Diaphragm designed for improved life and reduced maintenance
- Non-Hold-Open Handle, Fixed Metering Bypass and no external volume adjustment to ensure water conservation
- Flush accuracy controlled by CID® technology
- Free spinning Vandal Resistant Stop Cap and Adjustable Tailpiece
- Sweat Solder Adapter w/Cover Tube and Cast Wall Flange with Set Screw
- ¾" I.P.S. Screwdriver Bak-Chek® Angle Stop
- Spud Coupling and flange for ¾" Top Spud
- PERMEX® Synthetic Rubber Diaphragm with Dual Bypass
- ADA Compliant Solar-Powered Soils® Infrared Sensor for automatic "No Hands" operation
- Infrared Sensor with Multiple-focused, Lobular Sensing fields for high and low target detection
- Diaphragm, Stop Seat and Vacuum Breaker to be molded from PERMEX® rubber compound for Chloramine resistance

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037/ ASME A112.19.2/CSA B45.1

► **Note**

- Plumbing System Requirements
- Minimum Flowing Pressure: 25 PSI / Minimum Flow Rate: 18 GPM / Maximum Fixture Static Pressure: 80 PSI
- Maximum Fixture Static Pressure: 80 PSI

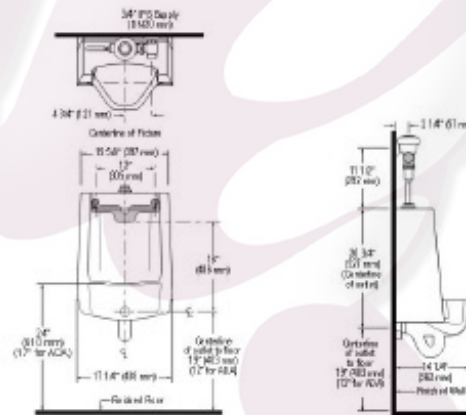

► **Disclaimer**

All information contained within this document subject to change without notice.

NOTE: All vitreous china dimensions shown in these drawings are nominal and not to scale. Dimensions can vary within the tolerances established in the governing ASME A112.19.2/CSA B45.1 standard. It is important to consider this when planning rough-in and plumbing layouts.

► **Compliance & Certifications**

ASME A112.1.3



This space for Architect/Engineer Approval