

Manual Royal® HET Flushometer and HET Water Closet WETS-2003.1001-1.6

Code Number

20031001

Specifications

Exposed chrome plated Royal® flushometer and floor mounted water closet.

▶ Flush Cycle

1.6 gpf/6.0Lpf

► Flushometer Specification

Quiet, diaphragm type, chrome plated closet Flushometer and vitreous china water closet with the following features:

- Flex Tube Dual Filtered Bypass Diaphragm designed for improved life and reduced maintenance
- Non-Hold-Open Handle, Fixed Metering Bypass and no external volume adjustment to ensure water conservation
- Flush accuracy controlled by CID® technology
- Free spinning Vandal Resistant Stop Cap and Adjustable Tailpiece
- 1" I.P.S screwdriver Bak-Chek® angle stop
- Spud coupling and flange for 1 ½" Top Spud

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037/ ASME A112.19.2/CSA B45.1


- Sweat Solder Adapter w/Cover Tube and Cast Wall Flange with Set Screw
- Diaphragm, Stop Seat and Vacuum Breaker to be molded from PERMEX® rubber compound for Chloramine resistance

▶ Fixture Specification

- White Vitreous china
- Fully glazed trapway
- Elongated bowl
- Siphon jet flush
- Closet bolts and caps included
- Toilet seat not included
- Recommended seats:
- Church 295CT/295SSCT & 2155CT/2155SSCT
- Bernis 1955CT/1955SSCT & 2155CT/2155SSCT
- Water closet shall be in compliance to the applicable sections of ASME A112.19.2/CSA B45.1
- Compliant with Buy American Act when purchased as a combination
- 1-1/2" I.P.S. top spud inlet
- 2½" fully glazed trapway
- · Floor mounted, Floor outlet

Plumbing System Requirements

Maximum Static Pressure: 80 PSI Minimum Flow Rate: 25 GPM Minimum Flowing Pressure: 25 PSI

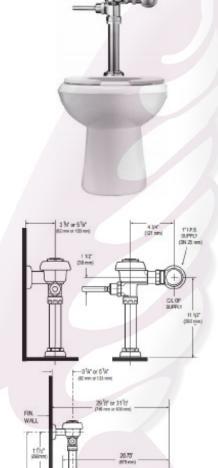

Note

All vitreous china dimensions shown in these drawings are nominal and not to scale. Dimensions can vary within the tolerances established in the governing ASME A112.19/CSA B45.1 standard. It is important to consider this when planning rough-in and plumbing layouts.

- 10" or 12"

▶ Compliance & Certifications



This space for Architect/Engineer Approval

