

► Code Number

3012672

► Description

Exposed high-efficiency urinal Flushometer, for 3/4" top spud high-efficiency urinals. For installations where reclaimed or recycled water is used for flushing.

► Specifications


Quiet, Exposed, Diaphragm Type, Chrome Plated Closet Flushometer for left or right hand supply with the following features:

- Features purple wall flange, diaphragm guide, bonnet and inner cover to communicate reclaimed water use
- Includes adhesive backed metal wallplate with non-potable water warning
- 3/4" I.P.S. Screwdriver Bak-Chek® Angle Stop w/ Free Spinning Vandal Resistant Stop Cap
- ADA Compliant Metal Oscillating Non-Hold-Open Handle with Triple Seal Handle Packing
- Adjustable Tailpiece
- High Back Pressure Vacuum Breaker Flush Connection with One-piece Bottom Hex Coupling Nut
- High Copper, Low Zinc Brass Castings for Dezincification Resistance
- Non-Hold-Open Handle, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Flush Accuracy Controlled by CID Technology
- High Back Pressure Vacuum Breaker Flush Connection, Spud Coupling and Flanges for 3/4" Exposed Top Spud
- Handle Packing, Stop Seat and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine Resistance

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037 and ANSI/ASME A112.19.2.



**NON-POTABLE WATER
DO NOT DRINK**
To conserve water,
this building uses reclaimed
water to flush toilets and urinals.
SLOAN.

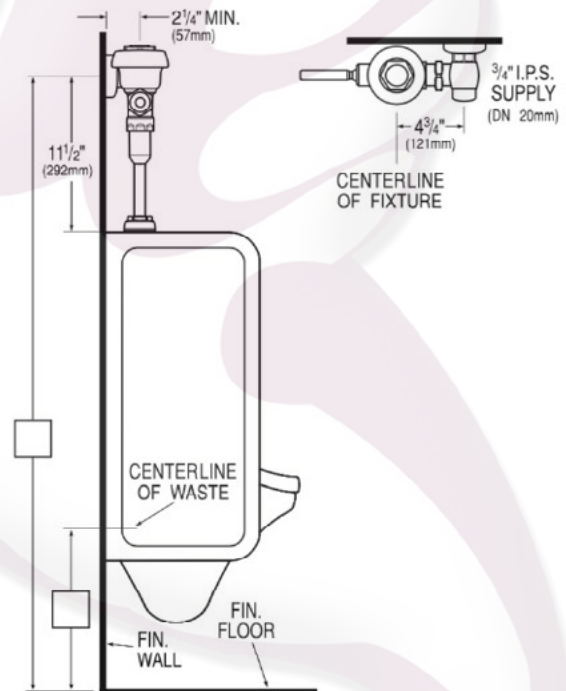

► Compliance & Certifications



Made In The
USA

