



Buy it for looks. Buy it for life.®

**FAUCET DESCRIPTION**

- Metal construction with various finishes identified by suffix
- Inlet shanks will accept 3/8" ball nose connections
- Includes side spray with Hydrolock® quick connect system

**OPERATION**

- Lever style handle
- Temperature controlled by 180° arc of handle travel
- Operates with less than 5 lbs. of force

**FLOW**

- Aerator is limited to 2.2 gpm max (8.3 L/min)

**CARTRIDGE**

- 1225 cartridge design
- Nonmetallic/nonferrous and stainless steel material


**STANDARDS**

- Third party certified to: ASME A112.18.1/CSA B125.1, ICC A117.1 and all applicable requirements referenced therein.
- Certified to ANSI/NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe Water Drinking Act
- ADA  for lever handles

**WARRANTY**

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations


**Specifications**

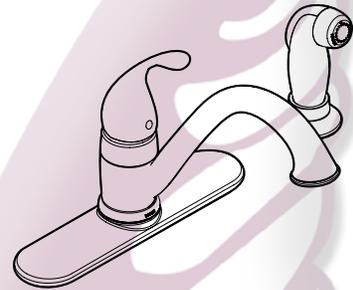

**Camerist™  
Single Handle Lever Kitchen Faucet  
with Protégé® Side Spray**

**Models:** 7840 series  
7825 series (without spray)

**NOTE:** DESIGNED TO INSTALL THROUGH  
1 HOLE, 1-1/4" (32mm) MIN. DIA. OR 2 HOLES  
1-1/4" (32mm) MIN. DIA. AND 4" ON CENTER

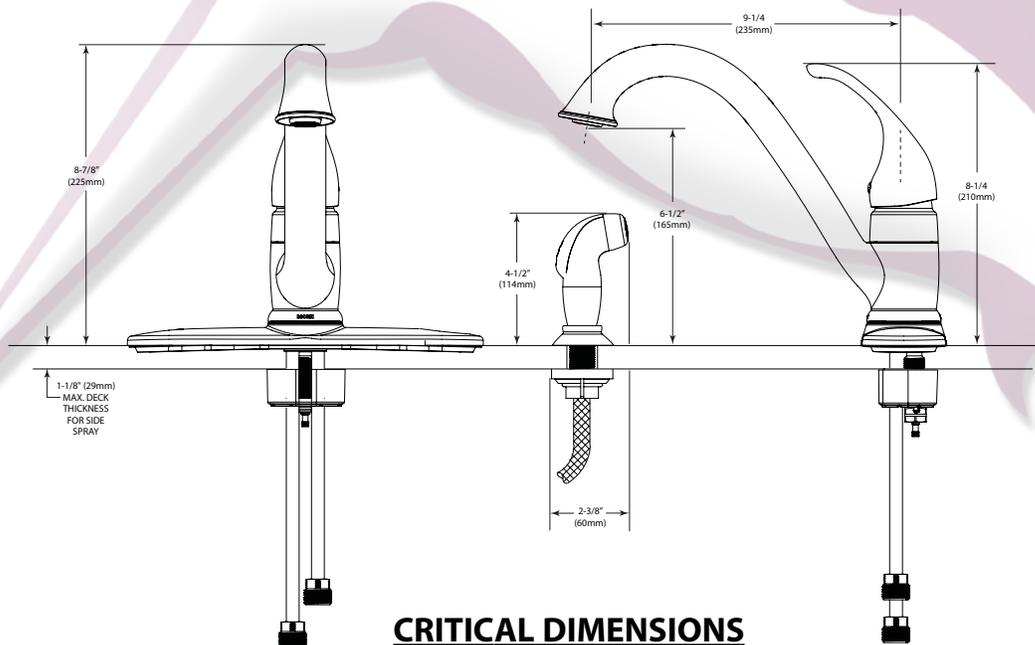

**CRITICAL DIMENSIONS**

(DO NOT SCALE)

