

► **Code Number**  
2102009

► **Description**  
Vitreous china floor mounted water closet

► **Flush Cycle**

- Model ST-2009-A Universal Closet (1.1 to 1.6 gpf/4.2 to 6.0 Lpf)
- Flush volume is determined by the flushometer used with fixture

► **FIXTURE SPECIFICATIONS**

- Siphon jet flushing action
- Fully glazed trapway
- Integral flushing rim
- Elongated bowl
- Water Spot Area 10" x 7 1/2"
- Closet bolts and caps included
- Water closet compliant to the applicable sections of ASME A112.19.2/CSA B45.1
- Toilet seat not included
- White Vitreous China
- 1 1/2" I.P.S. top spud inlet
- 2 1/8" fully glazed trapway diameter
- Floor mounted, floor outlet

**Recommended Seats**

- Bemis - 1955CT/1955SSCT & 2155CT/2155SSCT
- Church - 295CT/295SSCT & 2155CT/2155SSCT

► **Plumbing System Requirements**


- Maximum Static Pressure: 80 PSI
- Minimum Flow Rate: 25 GPM
- Minimum Flowing Pressure: 25 PSI

► **Product Specification**

- Elongated water closet shall be made of vitreous china with a 1-1/2" top spud. Water Closet shall be floor mounted. Water Closet shall be Sloan Model ST-2009-A.

► **Note**

- \* Please note that this model is fully interchangeable with Models: ST-2000-A, ST-2002-A, ST-2003-A and matches all dimensional and performance parameters.
- This model meets the requirements for a High Efficiency Toilet when used with a high efficiency flushometer (1.28 gpf/4.8 Lpf or 1.1/1.6 gpf-4.2/6.0 Lpf dual-flush).
- All information contained in this document subject to change without written notice
- All vitreous china dimensions shown in these drawings are nominal and not to scale. Dimensions can vary within the tolerances established in the governing ASME A112.19/CSA B45.1 standard. It is important to consider this when planning rough-in and plumbing layouts.

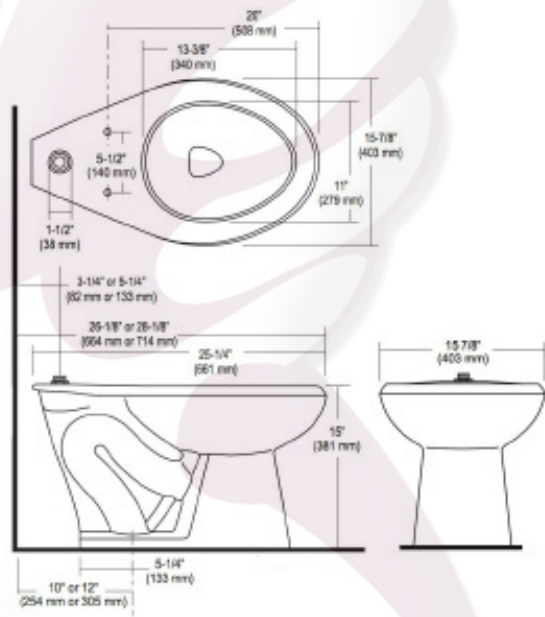

► **Compliance & Certifications**



This space for Architect/Engineer Approval